

## AIR OPERATED LOCKING DIFFERENTIAL

RD78A

Nissan H233B,31 SPL\*\*

## \*\*THIS MODEL WAS SUPERSEDED BY RD136, CROSSED OUT PARTS NOT AVAILABLE

PARTS LIST				
ITEM #	QTY	DESCRIPTION	PART#	NOTES
01	1	FLANGE CAP	<del>020302</del>	
02	1	CLUTCH GEAR	<del>050202</del>	
03	1	DIFFERENTIAL CASE	01030 <del>7</del>	
04	1	RETURN SPRINGS (PK OF 4)	150101SP	
05	1	RETAINING PIN SET (PK OF 4)	120303SP	
06	4	SHORT CROSS SHAFT	<del>060402</del>	
07	1	S GEAR THRUST WASHER (PK OF 2)	151002SP	
08	1	PISTON	040202SP	
09	1	BONDED SEAL	160705SP	
10	1	CYLINDER CAP ASSEMBLY	<del>030214</del>	
11	1	CYL CAP RETAINING BOLT (PK OF 8)	200205SP	
12	1	LOCKING TAB (8mm) (PK OF 8)	150401SP	
13	1	TAPERED ROLLER BEARING	NOT SUPPLIED	
14	1	ADJUSTER NUT	100102SP	
15	1	SEAL HOUSING KIT	081902SP	3
16	1	SEAL HOUSING O-RINGS (PK OF 2)	160235SP	1
17	1	SEAL HOUSING RETAINING CLIP	150601SP	
18	1	SPLINED SIDE GEAR	SEE NOTE	2
19	1	PINION THRUST WASHER (PK OF 4)	151102SP	
20	4	PINION GEAR	SEE NOTE	2
21	1	SPIDER BLOCK	070201SP	
22	1	THRUST BLOCK	110502SP	
23	1	SIDE GEAR	SEE NOTE	2
*	9	RING GEAR BOLT SPACER	4581061	
*	1	BULKHEAD FITTING KIT (O-RING TYPE)	170111	
*	1	PUSH-IN FITTING (5mm to 1/8"BSPP)	170201SP	
*	1	AIR LINE (5mm DIA X 6m LONG)	170301SP	
*	1	SOLENOID VALVE (12V)	180103	
*	1	SWITCH	180209SP	
*	1	SWITCH COVER (FRONT)	180210SP	
*	1	SWITCH COVER (REAR)	180211SP	
*	1	CABLE TIE (PK OF 25)	180305	
*	1	OPERATING & SERVICE MANUAL	210200	
*	1	INSTALLATION GUIDE	210278A	

<sup>\*</sup> Not illustrated in exploded view

## **NOTES**

- 1 For replacement O-rings use only BS133 Viton 75.
- 2 Available only as complete 6 gear set # 728A021
- 3 For seal housing set-up refer to tech note (Section 5.1 / 5.2).








RD78A

Nissan H233B,31 SPL\*\*

\*\*THIS MODEL WAS SUPERSEDED BY RD136, CROSSED OUT PARTS NOT AVAILABLE

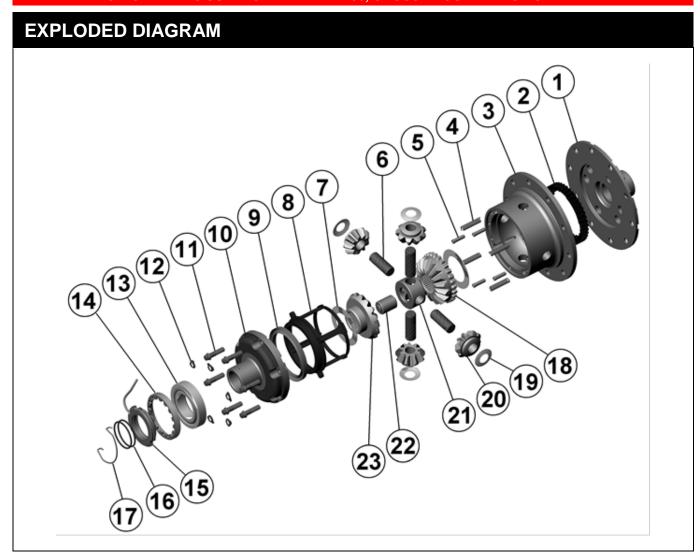

## **SPECIFICATIONS**

Axle Spline 31 tooth, Ø32.0mm [1.26"]

Ratio Supported Al

Ring Gear ID 146.0mm [5.75"]

Ring Gear Bolts 9 bolts on Ø176mm [6.93"]

Ring Gear Bolt Size 12mm

Ring Gear Torque 142Nm [105 ft-lb]

Backlash 0.15-0.20mm [0.006-0.008"]

Bearing Cap Torque 99Nm [73 ft-lb]