

AIR OPERATED LOCKING DIFFERENTIAL

RD64

Toyota 9.5",32 SPL**

**THIS MODEL WAS SUPERSEDED BY RD152, CROSSED OUT PARTS NOT AVAILABLE

PARTS LIST				
ITEM #	QTY	DESCRIPTION	PART#	NOTES
01	1	FLANGE CAP	023001	
02	1	CLUTCH GEAR	050202	
03	1	DIFFERENTIAL CASE	012701	
04	1	RETURN SPRINGS (PK OF 4)	150101SP	
05	1	RETAINING PIN SET (PK OF 4)	120303SP	
06	1	LONG CROSS SHAFT	060205	
07	2	SHORT CROSS SHAFT	060402	
08	1	PISTON	040202SP	
09	1	BONDED SEAL	160705SP	
10	1	CYLINDER CAP ASSEMBLY	030223	
11	1	CYL CAP RETAINING BOLT (PK OF 8)	200205SP	
12	1	LOCKING TAB (8mm) (PK OF 8)	150401SP	
13	1	TAPERED ROLLER BEARING	NOT SUPPLIED	
14	1	SEAL HOUSING RETAINING CLIP	150601SP	
15	1	SPLINED SIDE GEAR	SEE NOTE	2
16	1	PINION THRUST WASHER (PK OF 4)	151102SP	
17	4	PINION GEAR	SEE NOTE	2
18	1	SPIDER BLOCK	070201SP	
19	1	SIDE GEAR	SEE NOTE	2
20	1	S GEAR THRUST WASHER (PK OF 2)	151006SP	
21	1	ADJUSTER NUT	100101SP	
22	1	SEAL HOUSING KIT	081901SP	
23	1	SEAL HOUSING O-RINGS (PK OF 2)	160207SP	1
*	1	BULKHEAD FITTING KIT (O-RING TYPE)	170111	
*	1	PUSH-IN FITTING (5mm to 1/8"BSPP)	170201SP	
*	1	AIR LINE (5mm DIA X 6m LONG)	170301SP	
*	1	SOLENOID VALVE (12V)	180103	
*	1	SWITCH	180209SP	
*	1	SWITCH COVER (REAR)	180211SP	
*	1	CABLE TIE (PK OF 25)	180305	
*	1	OPERATING & SERVICE MANUAL	210200	
*	1	INSTALLATION GUIDE	210264	

^{*} Not illustrated in exploded view

NOTES

- 1 For replacement O-rings use only BS136 Viton 75.
- 2 Available only as complete 6 gear set # 728A091
- Refer to seal housing set-up tech note (Section 5.2).
- Older RD64 models with O-ring grooves in the cylinder cap use; cylinder cap #030216, seal housing #080102 and O-ring BS031 #160209.








RD64

Toyota 9.5",32 SPL**

**THIS MODEL WAS SUPERSEDED BY RD152, CROSSED OUT PARTS NOT AVAILABLE

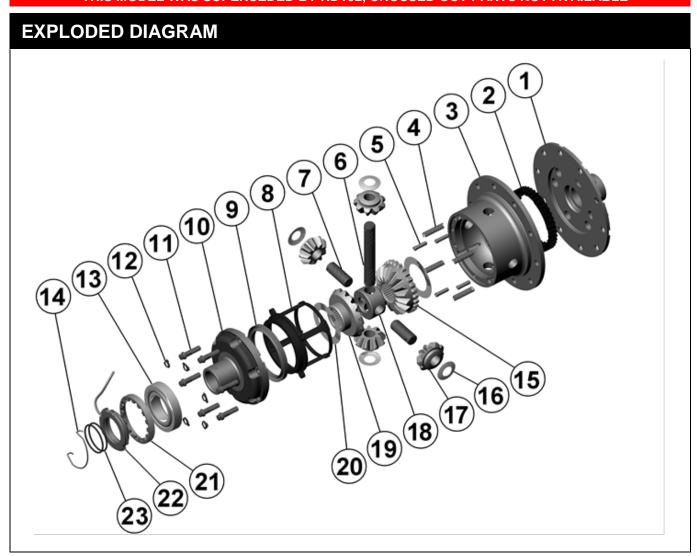

SPECIFICATIONS

Axle Spline 32 tooth, Ø34.8mm [1.37"]

Ratio Supported All

Ring Gear ID 150.0mm [5.91"] Ring Gear OD 241mm [9.5"]

Ring Gear Bolts 12 bolts on Ø174mm [6.85"]

Ring Gear Torque 95Nm [70 ft-lb]

Backlash 0.15-0.25mm [0.006-0.010"]

Bearing Cap Torque 95Nm [70 ft-lb]